

XTRABOND® 50

PREMIUM GRADE SILICONIZED LATEX SEALANT

XtraBond® 50 is a premium grade multi-purpose siliconized acrylic latex sealant. Manufactured and developed to provide excellent adhesion to vinyl, aluminum, wood, sheet metal and most common building materials without the need of a primer. It has been specially developed for the use in the installation of windows & doors and has minimal shrinkage. XtraBond® 50 cures rapidly to form a durable tight bond.

FEATURES

- Window & Door Approved
- Excellent Flexibility
- Clean Up with Water
- Mildew Resistant
- Paintable
- 50 Year Durability
- Quick Curing


APPLICATIONS

- Window & Door Applications
- Cultured Marble
- Tile
- Industrial Applications



SPECIFICATIONS

Skin Time	Less than 15 minutes @ 77 degF / 50% RH	
Tack Free Time	Less than 1 hour @ 77 degF / 50% RH	
Cure Rate	1/4" Bead per 24 Hrs	
VOC	9 g/L 0.0751 lb/gal	
Elongation @ Break	1200%	
Shore A	25 +/- 5	
Movement Capability	25%	
Lap Shear	550 psi	
Staining	None	
Low Temp. Flexibility	Retained to -90 deg. F.	
High Temp. Flexibility	Up to 425 deg. F for short periods	
Sag	None	

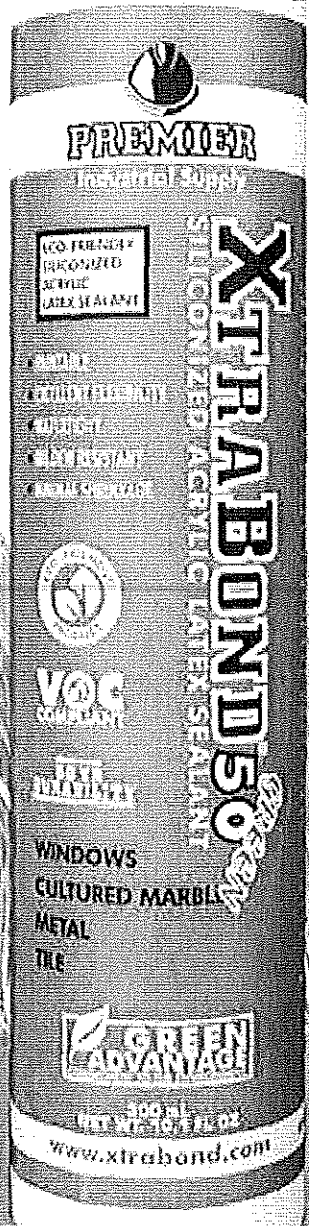

866-512-GLUE
WWW.PREMIERINDUSTRIAL.NET



XTRABOND®50

PREMIUM GRADE SILICONIZED LATEX SEALANT

SURFACE PREPARATIONS:

The substrate must be clean, dry, frost free, sound and free of any oils, greases or incompatible sealers, paints or coatings that may interfere with adhesion. Do not apply if surface is damp or contaminated. It is recommended to test all substrates prior to applications.

HOW TO USE:

For Best Results, make sure surface is clean, dry and free of oil or grease. Cut nozzle to desired bead size and puncture inner seal. Apply with a caulking gun forcing sealant onto the substrate, then tool if needed. Sealant will gain a skin in 15 minutes and exhibit full cure within 24 hours. Can be applied in warm or cold conditions. Clean excess material with water. It is the user's responsibility to thoroughly test any proposed uses with any and/or all substrates.

PACKAGING:

10.1 fl oz cartridges: Fixed-Tip or Twist-On Nozzles
Other packaging is available upon request.

STORAGE LIFE:

Material is to be stored under controlled dry environment (below 75 deg. F.) Use within 24 months from date of manufacture.

SPECIFICATIONS:

ASTM C-834.

LIMITED LIFETIME WARRANTY

This product is guaranteed to give satisfactory performance if applied in accordance with the label directions. Liability to Premier Industrial Supply, Inc. (Premier) is limited to a full refund of the purchase price or product replacement if product is proven defective. Premier shall not be liable for loss or damage, whether direct, consequential or incidental. There are no other warranties expressed or implied including the implied warranty of merchantability or fitness for a particular purpose.

XTRABOND®
SEALANTS AND ADHESIVES

PREMIER INDUSTRIAL SUPPLY
SEALANTS AND ADHESIVES



PREMIER
INDUSTRIAL SUPPLY
www.premierindustrial.net

866-512-GLUE
www.xtrabond.com

REV. 6/09 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

distributed by:

